




Est 1990

# Impact

Use the X-Protect Impact Barrier for ground level impact protection. It is ideal for segregating light weight vehicles or defining warehouse zones.

Our modular rails and bollards allow for damaged or worn parts to be replaced at a component level. If you need to replace any component - it is just a slide away.

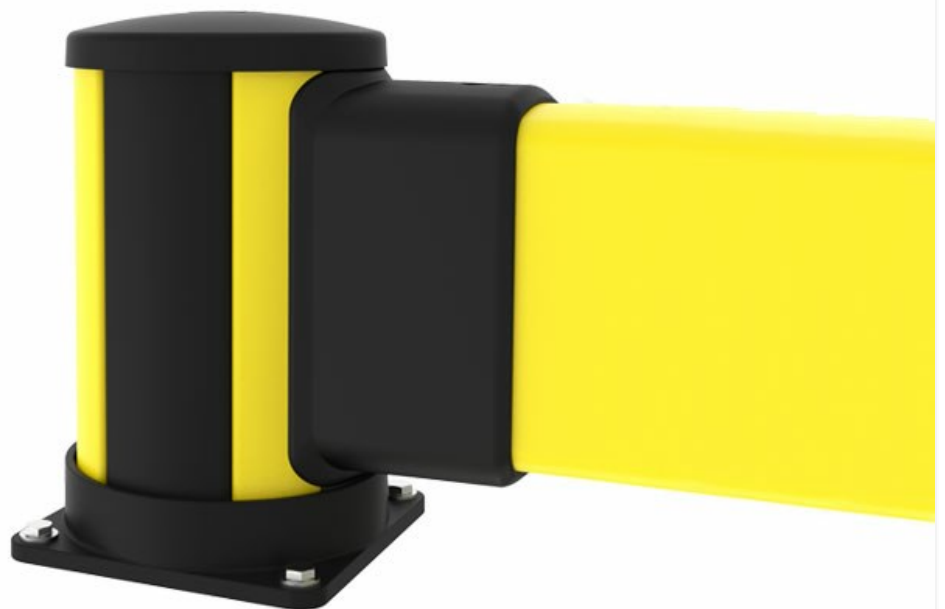

X-Protect is a unique approach to safety barriers. Unrivalled modularity, using only a few system components and damping that is built in to create a barrier system that changes with your work place. X-Protect allows rapid transformation, repair or replacement of existing barriers and bespoke configurations are limitless.

Impact test results					
Area of impact	Load	Equivalent to		90° Deflection	Force to fixings
Centre of barrier C - C as below					
2000mm	4500 J	2500 kg 6.8 km/h	5000 kg 4.8 km/h	350mm	4kN
2500mm	4200 J	2500 kg 6.5 km/h	5000 kg 4.6 km/h	390mm	6.6 kN
3000mm	3900 J	2500 kg 6.3 km/h	5000 kg 4.4 km/h	420mm	9.8 kN
Posts					
End post	4500 J	2500 kg 6.8 km/h	5000 kg 4.4 km/h	NA *	11.8 kN
Mid post	4500 J	2500 kg 6.8 km/h	5000 kg 4.8 km/h	NA *	13.6 kN

\* Deflection of posts is equivalent or less than that of the rail/s and is not considered to be critical for product selection. Performance is tested at height of the lowest rail. The post will perform better for lower strikes and deflection.

## Models

### Bollard 6 articles

ARTICLES / DESCRIPTION		HEIGHT (MM)	LENGTH (MM)	CC (MM)	COLOR
	<b>BCM1-035-I100</b> Impact mid	350			Zinc Yellow
	<b>BCM0-035-I100</b> Impact mid	350			Zinc Yellow Graphite Black
	<b>BCE1-035-I100</b> Impact end	350			Zinc Yellow
	<b>BCE0-035-I100</b> Impact end	350			Zinc Yellow Graphite Black
	<b>BCC1-035-I100</b> Impact corner	350			Zinc Yellow
	<b>BCC0-035-I100</b> Impact corner	350			Zinc Yellow Graphite Black

## Impact rails 9 articles

ARTICLES / DESCRIPTION	HEIGHT (MM)	LENGTH (MM)	CC (MM)	COLOR
 <b>RCI1-277-0300</b> Impact rail		2770	3000	Zinc Yellow
 <b>RCI1-227-0250</b> Impact rail		2270	2500	Zinc Yellow
 <b>RCI1-177-0200</b> Impact rail		1770	2000	Zinc Yellow
 <b>RCI1-127-0150</b> Impact rail		1270	1500	Zinc Yellow
 <b>RCI1-077-0100</b> Impact rail		770	1000	Zinc Yellow
 <b>RCI1-047-0070</b> Impact rail		470	700	Zinc Yellow
 <b>RCI1-027-0050</b> Impact rail		270	500	Zinc Yellow
 <b>RCI1-067-0090</b> Impact rail		670	900	Zinc Yellow
 <b>RCI1-197-0220</b> Impact rail		1970	2200	Zinc Yellow

## Related products

---



### IMPACT BARRIERS

#### Impact high

Use the X-Protect Impact High Barrier for high level impact protection. It is ideal for segregating light weight vehicles or defining warehouse zones. Our modular rails and bollards allow for damag...

[15 articles](#)



### IMPACT BARRIERS

#### Double impact

Use the X-Protect Double Impact Barrier configuration to protect structures from high level, heavy duty impacts. It is one of our strongest Impact protection configurations. Our modular rails and b...

[15 articles](#)



### IMPACT BARRIERS

#### Double impact low

Use the X-Protect Double Impact Low Barrier configuration to protect structures from ground level, heavy duty impacts. It is one of our strongest Impact protection configurations and also&nbsp;idea...

[15 articles](#)



### CLASSIC PEDESTRIAN BARRIER


#### Pedestrian with impact

Use the X-Protect Pedestrian + Impact barrier configuration to protect walkways from medium duty vehicles where there is an increased risk of ground level impacts. It is also possible to combine wi...

[19 articles](#)

## **X-Protect is Safe**

- ✓ Our impact protection products undergo rigorous testing at our state-of-the-art testing facility.
- ✓ With decades of experience in industrial safety, we've designed our impact protection to perform effectively in real-world conditions.
- ✓ We know safety and can guide you to the best solutions tailored to your specific needs.

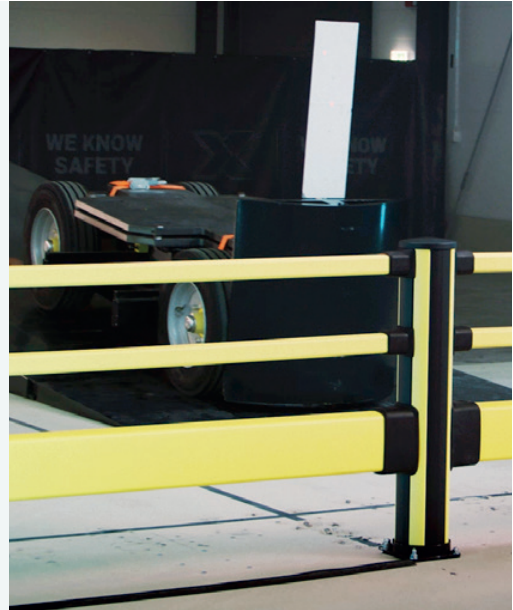

## **X-Protect is Modular**

- ✓ Quickly modify barrier specifications with minimal waste.
- ✓ Perform easy and cost-effective repairs at a component level.
- ✓ Quickly build strong integrated installations with few parts.



## **X-Protect is Sustainable**

- ✓ Simple end of life dis-assembly, even after an accident.
- ✓ Single material components that are easy to recycle.
- ✓ Repairable by design, damaged or worn components are easily replaced extending the barrier's life.



## X-Protect components

These are the building blocks of our modular Impact Protection range.

### BARRIERS & RAILS

#### Hand Rails



Width x Height:

68 x 72 mm | 2 11/16" x 2 27/32"

Length:

270 - 1770 mm | 10 5/8" - 69 11/16"

#### Impact Barriers



Width x Height:

116 x 220 mm | 4 9/16" x 8 21/32"

Length:

270 - 2770 mm | 10 5/8" - 109 1/16"

### POSTS & BOLLARDS



Height:

350 - 1160 mm

13 13/16" -

45 11/16"

Width:

200 mm

7 7/8" in



## Component Colours



RAL 1018




RAL 9011

## X-Protect Standard Configurations

+ the highest impact energy (J) they are capable of withstanding\*



\* The highest force depends on the C-C. More information is available upon request.

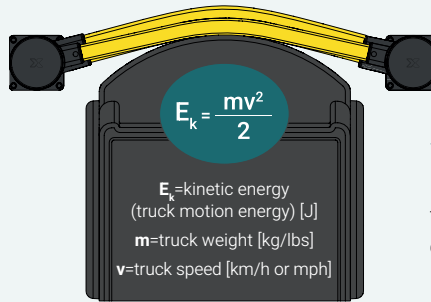

## Impact testing

This is how we calculate the energy from a vehicle impact.



Speed	Load
6 km/h   3.7 mph	5020 J
8 km/h   5 mph	8880 J
12 km/h   7.5 mph	19960 J




Speed	Load
6 km/h   3.7 mph	3770 J
8 km/h   5 mph	6660 J
12 km/h   7.5 mph	14970 J



Speed	Load
6 km/h   3.7 mph	2930 J
8 km/h   5 mph	5180 J
12 km/h   7.5 mph	11670 J


## Operating temperature



## Assembly



SCAN THE CODE TO  
 DOWNLOAD OUR  
 ASSEMBLY MANUALS

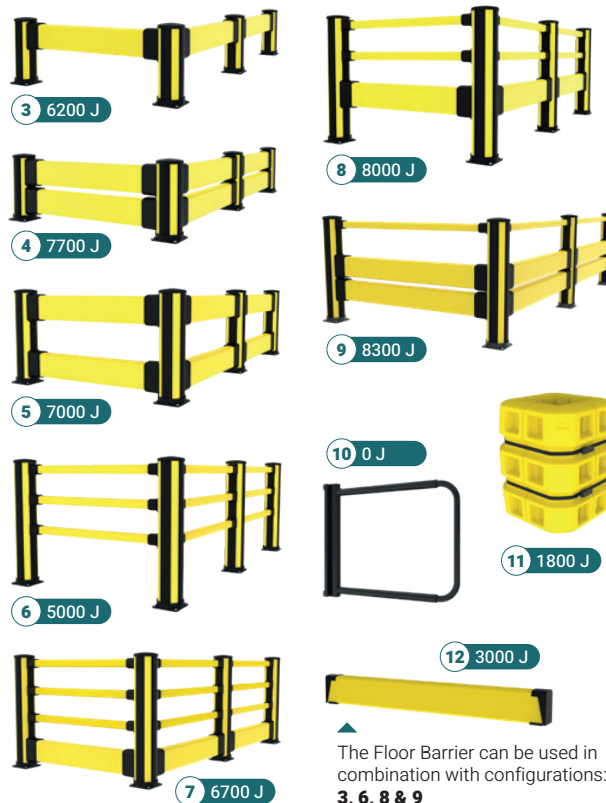

1. Bollards
2. Impact
3. Impact High
4. Double Impact Low
5. Double Impact High
6. Pedestrian
7. Pedestrian + Impact
8. Pedestrian + Impact High
9. Pedestrian + Double Impact
10. Pedestrian Gate
11. Column Guard
12. Floor Barrier

The Floor Barrier can be used in combination with configurations: 3, 6, 8 & 9