




Est 1990

Pedestrian with impact high

Use the X-Protect Pedestrian + Impact high barrier configuration to protect walkways from medium duty vehicles where there is a reduced risk of ground level impacts. It is also possible to combine with a pedestrian gate. The pedestrian gate is self closing, provided with a universal handle and width is adjustable from 690-1210 mm.

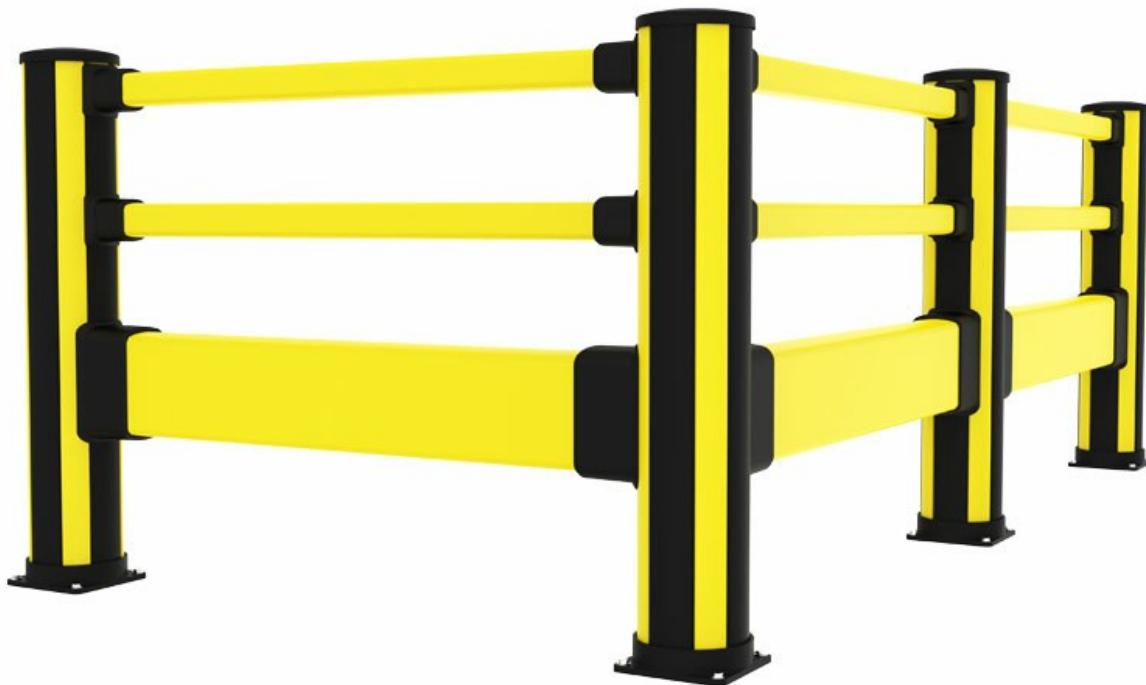

X-Protect is a unique approach to safety barriers. Unrivalled modularity, using only a few system components and damping that is built in to create a barrier system that changes with your work place. X-Protect allows rapid transformation, repair or replacement of existing barriers and bespoke configurations are limitless.

Impact test results					
<i>Area of impact</i>	<i>Load</i>	<i>Equivalent to</i>	<i>90° Deflection</i>	<i>Force to fixings</i>	
Centre of barrier C - C as below					
2000mm	8000 J	2500 kg 9.1 km/h	5000 kg 6.4 km/h	450mm	17 kN
Posts					
End post	1850 J	2500 kg 4.3 km/h	5000 kg 3 km/h	NA *	11.6 kN
Mid post	2450 J	2500 kg 5 km/h	5000 kg 3.5 km/h	NA *	12.7 kN

* Deflection of posts is equivalent or less than that of the rail/s and is not considered to be critical for product selection. Performance is tested at height of the lowest rail. The post will perform better for lower strikes and deflection.

Models


Posts 6 articles

ARTICLES / DESCRIPTION	HEIGHT (MM)	LENGTH (MM)	CC (MM)	COLOR
 BCC1-116-I1P2 Pedestrian + Impact High corner	1160			Zinc Yellow
 BCC0-116-I1P2 Pedestrian + Impact High corner	1160			Zinc Yellow Graphite Black
 BCM1-116-I1P2 Pedestrian + Impact High mid	1160			Zinc Yellow
 BCM0-116-I1P2 Pedestrian + Impact High mid	1160			Zinc Yellow Graphite Black
 BCE1-116-I1P2 Pedestrian + Impact High end	1160			Zinc Yellow
 BCE0-116-I1P2 Pedestrian + Impact High end	1160			Zinc Yellow Graphite Black

Impact rails 7 articles

ARTICLES / DESCRIPTION	HEIGHT (MM)	LENGTH (MM)	CC (MM)	COLOR
 RCI1-027-0050 Impact rail	270	500		Zinc Yellow
 RCI1-277-0300 Impact rail	2770	3000		Zinc Yellow
 RCI1-227-0250 Impact rail	2270	2500		Zinc Yellow
 RCI1-177-0200 Impact rail	1770	2000		Zinc Yellow
 RCI1-127-0150 Impact rail	1270	1500		Zinc Yellow
 RCI1-077-0100 Impact rail	770	1000		Zinc Yellow
 RCI1-047-0070 Impact rail	470	700		Zinc Yellow

Hand rails 5 articles

ARTICLES / DESCRIPTION	HEIGHT (MM)	LENGTH (MM)	CC (MM)	COLOR
 RCP1-027-0050 Hand rail	270	500		Zinc Yellow
 RCP1-047-0070 Hand rail	470	700		Zinc Yellow
 RCP1-077-0100 Hand rail	770	1000		Zinc Yellow
 RCP1-127-0150 Hand rail	1270	1500		Zinc Yellow
 RCP1-177-0200 Hand rail	1770	2000		Zinc Yellow

Gate 1 articles

ARTICLES / DESCRIPTION	HEIGHT (MM)	LENGTH (MM)	CC (MM)	COLOR
 GCP8-069-0121 Pedestrian gate, 690-1210 mm				

Related products




PEDESTRIAN BARRIERS

Pedestrian gate

Universally handed, self closing and width adjustable from 690mm to 1210 mm.

[1 articles](#)

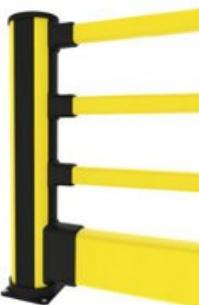


CLASSIC PEDESTRIAN BARRIER

Pedestrian with impact

Use the X-Protect Pedestrian + Impact barrier configuration to protect walkways from medium duty vehicles where there is an increased risk of ground level impacts. It is also possible to combine wi...

[19 articles](#)

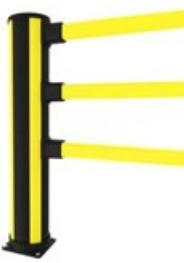

CLASSIC PEDESTRIAN BARRIER

Pedestrian

Use the X-Protect Pedestrian barrier configuration to define pedestrian routes and protect from light duty impacts. It is also possible to combine with a pedestrian gate. The pedestrian gate is sel...

[12 articles](#)

X-Protect components

These are the building blocks of our modular Impact Protection range.

BARRIERS & RAILS

Hand Rails



Width x Height:

68 x 72 mm | 2 11/16" x 2 27/32"

Length:

270 - 1770 mm | 10 5/8" - 69 11/16"

Impact Barriers



Width x Height:

116 x 220 mm | 4 9/16" x 8 21/32"

Length:

270 - 2770 mm | 10 5/8" - 109 1/16"

POSTS & BOLLARDS



Classic

4 connection sides

Width:
200 mm
7 7/8"

Height:
350 -
1160 mm
13 13/16" -
45 11/16"



Essential

2 connection sides

Width:
132 mm
5 3/16"



Height:
620 -
1170 mm
24 7/16" -
46 1/16"

Height:
350 -
1160 mm
13 13/16" -
45 11/16"

X-Protect Standard Configurations

+ the highest impact energy (J) they are capable of withstanding*

* The highest force depends on the C-C. More information is available upon request.

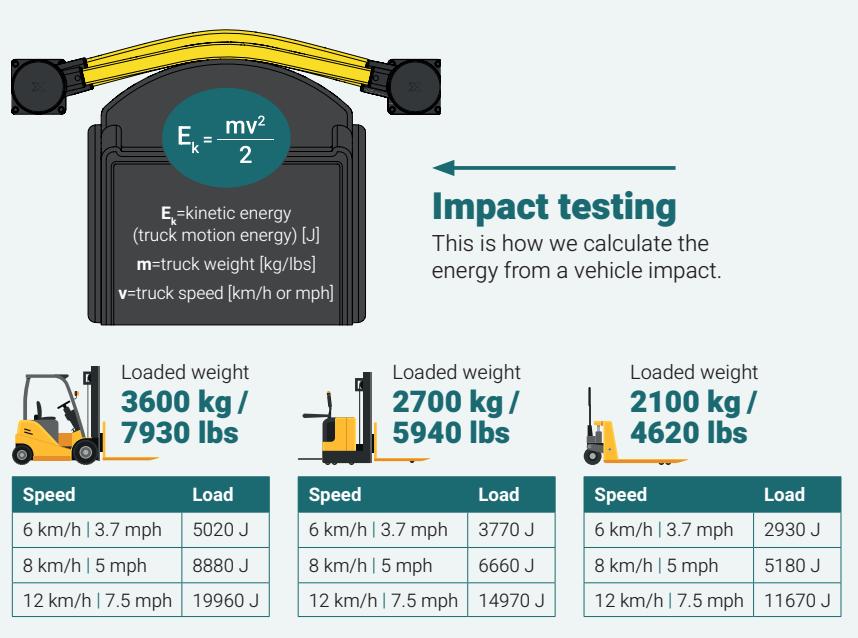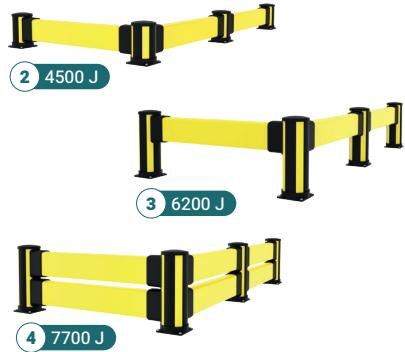

Component Colours

Yellow: RAL 1018 Black: RAL 9011

Operating temperature

-10°C → 40°C

