




Est 1990

Impact High with Floor Barrier

The Impact High with Floor Barrier is an innovative solution designed to offer pallet racking end-frame protection and perimeter security within your workspace. This system combines the benefits of the Impact High and the Floor Barrier, specifically engineered to absorb significant impacts from vehicle forks, AMRs, AGVs, and other low-height hazards, ensuring the safety of your assets and infrastructure.

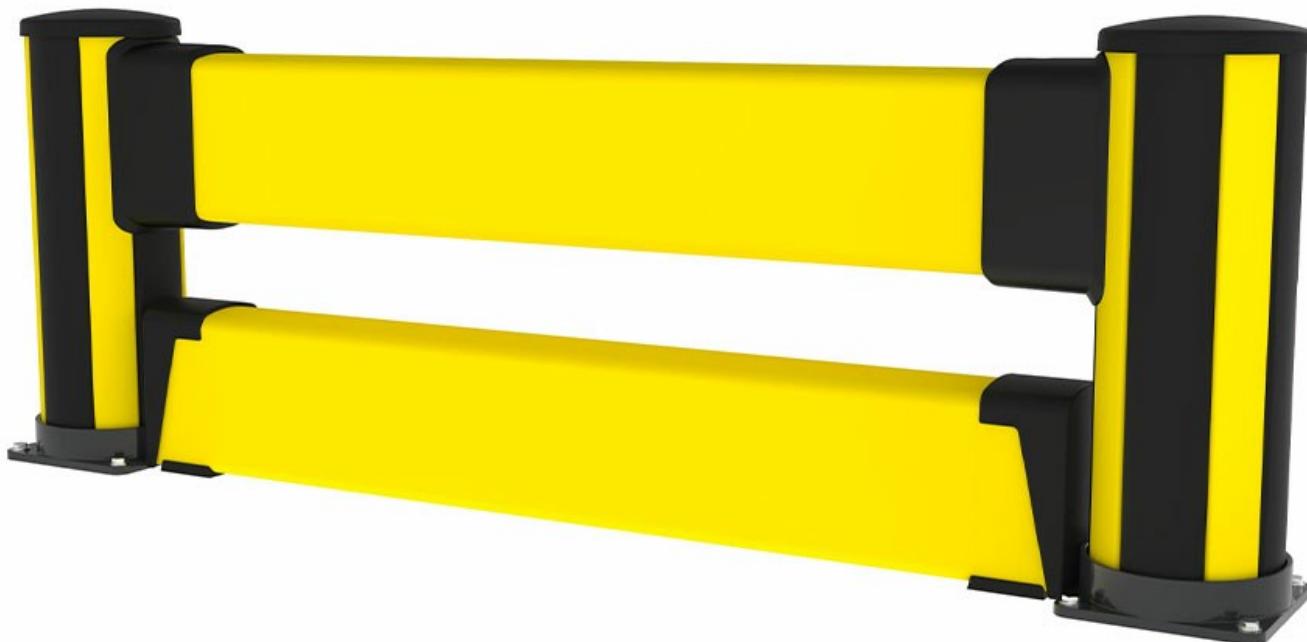

The Impact High with Floor Barrier is ideal for safeguarding vital infrastructure from the everyday risks associated with vehicle forks and pallets in transit. Its design increases the durability and safety of your facility, helping to maintain operational continuity against specific challenges posed by fork-equipped vehicles.

Installation of the Impact High with Floor Barrier is streamlined and minimally invasive, with a low fixing count and spanning up to 3.2 meters in a single section.

Moreover, the system's adaptability is a key feature, equipped with push-fit parts and heavy-duty expansion bolts for easy assembly. Our drilling template facilitates quick adjustments, allowing the system to adapt to the evolving safety requirements of your workspace.

Models

Posts 6 articles

ARTICLES / DESCRIPTION	HEIGHT (MM)	LENGTH (MM)	CC (MM)	COLOR
 BCC1-061-I100 Impact High corner	610			Zinc Yellow
 BCC0-061-I100 Impact High corner	610			Zinc Yellow Graphite Black
 BCM1-061-I100 Impact High mid	610			Zinc Yellow
 BCM0-061-I100 Impact High mid	610			Zinc Yellow Graphite Black
 BCE1-061-I100 Impact High end	610			Zinc Yellow
 BCE0-061-I100 Impact High end	610			Zinc Yellow Graphite Black

Impact Rails 9 articles

ARTICLES / DESCRIPTION	HEIGHT (MM)	LENGTH (MM)	CC (MM)	COLOR
 RCI1-277-0300 Impact rail		2770	3000	Zinc Yellow
 RCI1-227-0250 Impact rail		2270	2500	Zinc Yellow
 RCI1-177-0200 Impact rail		1770	2000	Zinc Yellow
 RCI1-127-0150 Impact rail		1270	1500	Zinc Yellow
 RCI1-077-0100 Impact rail		770	1000	Zinc Yellow
 RCI1-047-0070 Impact rail		470	700	Zinc Yellow

	RCI1-027-0050 Impact rail	270	500	Zinc Yellow
	RCI1-067-0090 Impact rail	670	900	Zinc Yellow
	RCI1-197-0220 Impact rail	1970	2200	Zinc Yellow

End packs 2 articles

ARTICLES / DESCRIPTION	HEIGHT (MM)	LENGTH (MM)	CC (MM)	COLOR
	FCE3-022-I100-2 Floor barrier end - 2 pack	221		Graphite Black
	FCE3-022-I100-10 Floor barrier end - 10 pack	221		Graphite Black

Related products



CLASSIC PEDESTRIAN BARRIER

Pedestrian with Floor Barrier

Improve your workspace's safety and pedestrian and traffic flows with the configuration Pedestrian with Floor Barrier. Designed to efficiently segregate pedestrian walkways from vehicular routes, i...

[27 articles](#)



IMPACT BARRIERS

Impact high

Use the X-Protect Impact High Barrier for high level impact protection. It is ideal for segregating light weight vehicles or defining warehouse zones. Our modular rails and bollards allow for damag...

[15 articles](#)



X-PROTECT

Standalone Floor Barrier

Designed to serve as a standalone solution, it improves the safeguarding of building perimeters and vital infrastructure from the everyday risks of vehicle forks, pallets in transit, AMRs and AGVs,...

[17 articles](#)

X-Protect components

These are the building blocks of our modular Impact Protection range.

BARRIERS & RAILS

Hand Rails



Width x Height:

68 x 72 mm | 2 11/16" x 2 27/32"

Length:

270 - 1770 mm | 10 5/8" - 69 11/16"

Impact Barriers



Width x Height:

116 x 220 mm | 4 9/16" x 8 21/32"

Length:

270 - 2770 mm | 10 5/8" - 109 1/16"

POSTS & BOLLARDS



Classic

4 connection sides

Height:
350 -
1160 mm
13 13/16" -
45 11/16"

Width:
200 mm
7 7/8"



Essential

2 connection sides

Height:
620 -
1170 mm
24 7/16" -
46 1/16"

Width:
132 mm
5 3/16"



Height:
620 -
1170 mm
24 7/16" -
46 1/16"

Width:
132 mm
5 3/16"

X-Protect Standard Configurations

+ the highest impact energy (J) they are capable of withstanding*

* The highest force depends on the C-C. More information is available upon request.

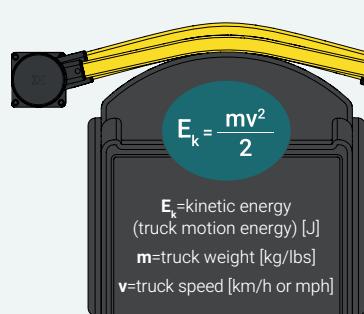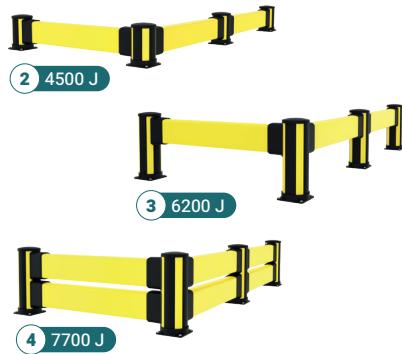

Impact testing

This is how we calculate the energy from a vehicle impact.



Speed	Load
6 km/h 3.7 mph	5020 J
8 km/h 5 mph	8880 J
12 km/h 7.5 mph	19960 J



Speed	Load
6 km/h 3.7 mph	3770 J
8 km/h 5 mph	6660 J
12 km/h 7.5 mph	14970 J




Speed	Load
6 km/h 3.7 mph	2930 J
8 km/h 5 mph	5180 J
12 km/h 7.5 mph	11670 J

Component Colours

Yellow: RAL 1018 Black: RAL 9011

Operating temperature

-10°C → 40°C

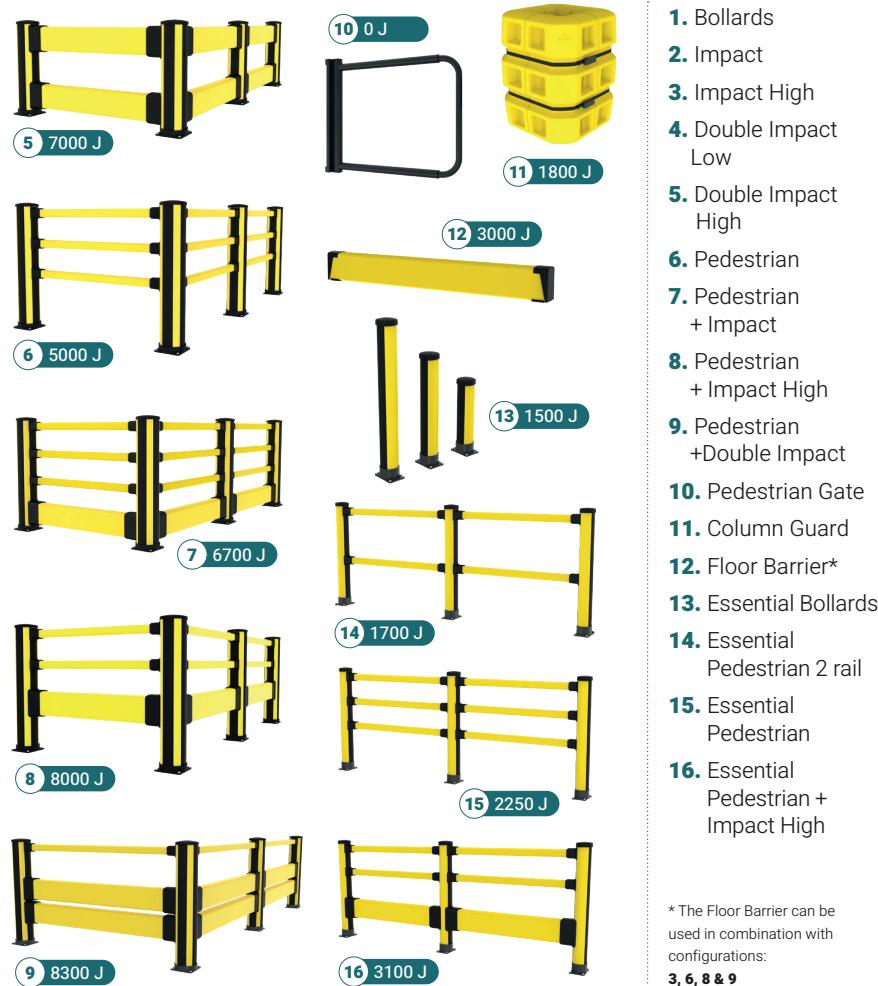

* The Floor Barrier can be used in combination with configurations:
3, 6, 8 & 9