

Pedestrian with Double Impact

Protect walkways and infrastructure with Pedestrian with Double Impact from medium duty, high level impacts where there is a reduced risk of ground level impacts. The built-in damping and modular components enable quick reconfiguration, ensuring optimal safety for changing environments.



When should you use the Pedestrian with Double Impact configuration?

The Pedestrian with Double Impact configuration protects walkways and infrastructure from medium-duty, high-level impacts where ground-level risk is lower. It can be easily integrated with a self-closing pedestrian gate, equipped with a universal handle and adjustable width (690–1210 mm).







This impact protection system offers a unique approach to safety barriers. It offers modularity, relying on few system components and incorporating built-in damping to create a barrier solution that adapts to your workplace. The system supports rapid transformation, repair, or replacement of existing barriers, and bespoke configurations have no limits.

Impact test results					
Area of impact	Load	Equivalent to		90° deflection	Force to fixings
Centre of barrier C - C as below					
2000mm	8300 J	2500 kg 9.3 km/h	5000 kg 6.4 km/h	380mm	11.2 kN
Posts					
End post	2400 J	2500 kg 5 km/h	5000 kg 3.5 km/h	NA *	9.3 kN
Mid post	2550 J	2500 kg 5.1 km/h	5000 kg 3.7 km/h	NA *	12.7 kN






*Deflection of posts is equivalent or less than that of the rail/s and is not considered to be critical for production selection. Performance is tested at height of the lowest rail. The post will perform better for lower strikes and deflection will be reduced.

Models






Posts 6 articles

ARTICLES / DESCRIPTION	HEIGHT (MM)	LENGTH (MM)	CC (MM)	COLOR
 BCE0-116-I2P1 End post	1160			Zinc Yellow Graphite Black
 BCE1-116-I2P1 End post	1160			Zinc Yellow
 BCM0-116-I2P1 Mid post	1160			Zinc Yellow Graphite Black
 BCM1-116-I2P1 Mid post	1160			Zinc Yellow
 BCC0-116-I2P1 Corner post	1160			Zinc Yellow Graphite Black
 BCC1-116-I2P1 Corner post	1160			Zinc Yellow

Impact rails 5 articles

ARTICLES / DESCRIPTION	HEIGHT (MM)	LENGTH (MM)	CC (MM)	COLOR
 RCI1-027-0050		270	500	Zinc Yellow
 RCI1-047-0070		470	700	Zinc Yellow
 RCI1-077-0100		770	1000	Zinc Yellow
 RCI1-127-0150		1270	1500	Zinc Yellow
 RCI1-177-0200		1770	2000	Zinc Yellow

Hand rail 5 articles

ARTICLES / DESCRIPTION	HEIGHT (MM)	LENGTH (MM)	CC (MM)	COLOR
 RCP1-027-0050		270	500	Zinc Yellow
 RCP1-047-0070		470	700	Zinc Yellow
 RCP1-077-0100		770	1000	Zinc Yellow
 RCP1-127-0150		1270	1500	Zinc Yellow
 RCP1-177-0200		1770	2000	Zinc Yellow

Gate 1 articles

ARTICLES / DESCRIPTION	HEIGHT (MM)	LENGTH (MM)	CC (MM)	COLOR
 GCP3-069-0121 Pedestrian gate 690-1210mm				Graphite Black

Related products



PEDESTRIAN BARRIERS

Pedestrian gate

Universally handed, self closing and width adjustable from 690mm to 1210 mm.

[1 articles](#)




CLASSIC PEDESTRIAN BARRIER

Pedestrian with impact high

Use the X-Protect Pedestrian + Impact high barrier configuration to protect walkways from medium duty vehicles where there is a reduced risk of ground level impacts. It is also possible to combine...

[19 articles](#)



CLASSIC PEDESTRIAN BARRIER


Pedestrian

Use the X-Protect Pedestrian barrier configuration to define pedestrian routes and protect from light duty impacts. It is also possible to combine with a pedestrian gate. The pedestrian gate is sel...

[12 articles](#)

X-Protect is Safe

- ✓ Our impact protection products undergo rigorous testing at our state-of-the-art testing facility.
- ✓ With decades of experience in industrial safety, we've designed our impact protection to perform effectively in real-world conditions.
- ✓ We know safety and can guide you to the best solutions tailored to your specific needs.

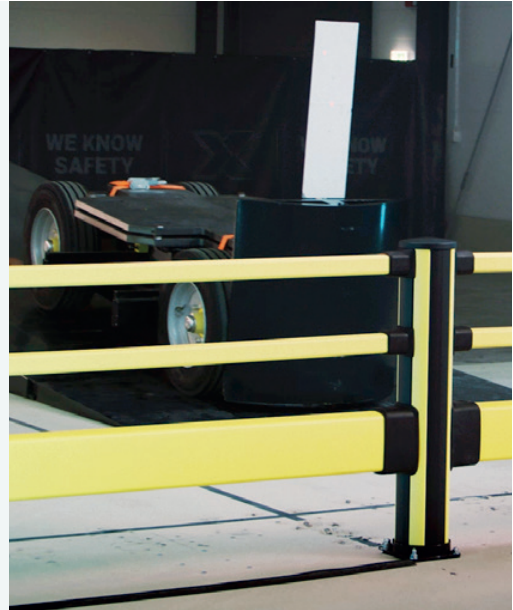

X-Protect is Modular

- ✓ Quickly modify barrier specifications with minimal waste.
- ✓ Perform easy and cost-effective repairs at a component level.
- ✓ Quickly build strong integrated installations with few parts.



X-Protect is Sustainable

- ✓ Simple end of life dis-assembly, even after an accident.
- ✓ Single material components that are easy to recycle.
- ✓ Repairable by design, damaged or worn components are easily replaced extending the barrier's life.



X-Protect components

These are the building blocks of our modular Impact Protection range.

BARRIERS & RAILS

Hand Rails



Width x Height:

68 x 72 mm | 2 11/16" x 2 27/32"

Length:

270 - 1770 mm | 10 5/8" - 69 11/16"

Impact Barriers



Width x Height:

116 x 220 mm | 4 9/16" x 8 21/32"

Length:

270 - 2770 mm | 10 5/8" - 109 1/16"

POSTS & BOLLARDS



Height:

350 - 1160 mm

13 13/16" -

45 11/16"

Width:

200 mm

7 7/8" in



Component Colours



RAL 1018




RAL 9011

X-Protect Standard Configurations

+ the highest impact energy (J) they are capable of withstanding*



* The highest force depends on the C-C. More information is available upon request.

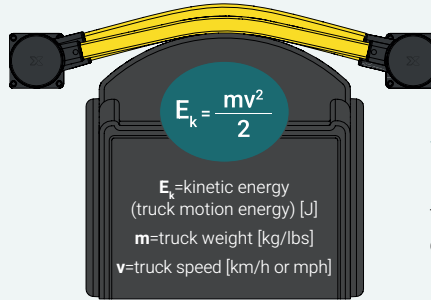

Impact testing

This is how we calculate the energy from a vehicle impact.



Loaded weight
3600 kg / 7930 lbs



Loaded weight
2700 kg / 5940 lbs




Loaded weight
2100 kg / 4620 lbs

Speed	Load
6 km/h 3.7 mph	5020 J
8 km/h 5 mph	8880 J
12 km/h 7.5 mph	19960 J

Speed	Load
6 km/h 3.7 mph	3770 J
8 km/h 5 mph	6660 J
12 km/h 7.5 mph	14970 J

Speed	Load
6 km/h 3.7 mph	2930 J
8 km/h 5 mph	5180 J
12 km/h 7.5 mph	11670 J


Operating temperature



Assembly



SCAN THE CODE TO
 DOWNLOAD OUR
 ASSEMBLY MANUALS



The Floor Barrier can be used in combination with configurations: **3, 6, 8 & 9**

1. Bollards
2. Impact
3. Impact High
4. Double Impact Low
5. Double Impact High
6. Pedestrian
7. Pedestrian + Impact
8. Pedestrian + Impact High
9. Pedestrian + Double Impact
10. Pedestrian Gate
11. Column Guard
12. Floor Barrier